

XSA



100mm

-
- 15mm
- ISO7235
-
-
- 20m/s
- EN13501 A1
-
- 94/9/EC(ATEX) 1 2 21 22
- 100°C

•

-
-
- AIMg3

- XSA
-
-
- VDI6022
- ATEX 1 2 21 22

-
- 30%
- /
-
-

- XSA-100 100mm
- XSA-200 200mm
- XSA-230 230mm
- XSA-300 300mm

- F
- L

- P 30mm
- W 35x35x3mm

- ①
-
-

-
- 15mm
-
-
- 100°C

-
-
-


- EN13501 A1
- RAL RAL-GZ 388
- TRGS 905
- 20m/s
-

EU 97/69/EG

XSA XKA

XKA

MSA, XSA

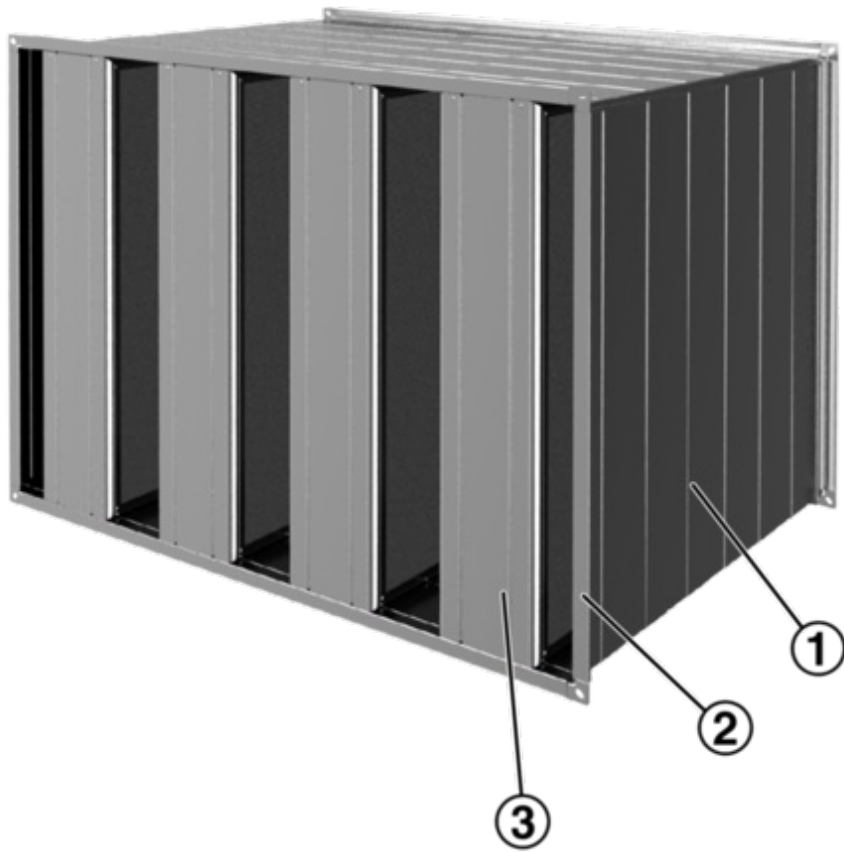

- ①
- ②
- ③

15mm

ISO7235

VDI6022 DIN1946 VDI3803

-
- 30%
- /
-
-

-
-
-

- EN13501 A1
- RAL RAL-GZ 388
- TRGS 905 EU 97/69/EG
- 20m/s
-

- F
- L

- P 30mm
- W 35x35x3mm

- 100 200 230 300mm
- 140 × 150 × 500 mm – 2400 × 1800 × 1500 mm
- 4800mm
- 3600mm
- 3000mm
- -100°C



XSA	P	30mm
	W	35 x 35 x 3 mm (required for sound attenuators with width and/or height subdivided)
[mm]		
100	F	
200	L	
230		
300		
	B [mm]	
[mm]	H [mm]	
	L [mm]	



46
215021
: (+86) 0512-67168869

>

>

: (+86) 021-52981838
: troxchn@troxchina.com

: (+86) 010-88016761
: troxbj@troxchina.com

: (+86) 020-34072475
: troxgz@troxchina.com

TROX

