

TVT



VAV

- 21,000 m³/h 5,800 l/s
-
- Easy
-
- 10m/s
- EN1751 3
- EN1751 C

-
- TX
- WT

> > > > VAV > TVT



- TVT
-
-
-



- 3mm
-
-



- TVT VAV
- TVT-D VAV
- / TX
-

-
- P1 RAL 7001

-
-
-
-
-
-
-

- Easy
-
-
- LABCONTROL:


- TX
- WT

-
-
-
-
-
-

-
-
- ABS 50 °C
-

-
-
-

- EN13501 A2
- RAL RAL-GZ388
- TRGS 905 () EU 97/69/EG

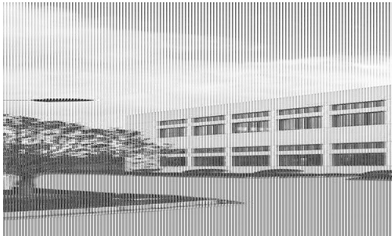

46
215021
: (+86) 0512-67168869

TROX



: (+86) 021-52981838
: troxchn@troxchina.com

: (+86) 010-88016761
: troxbj@troxchina.com

: (+86) 020-34072475
: troxgz@troxchina.com